





Telstra Dave 4G ZTE T83 Logic Board Replacement

Written By: Ryan

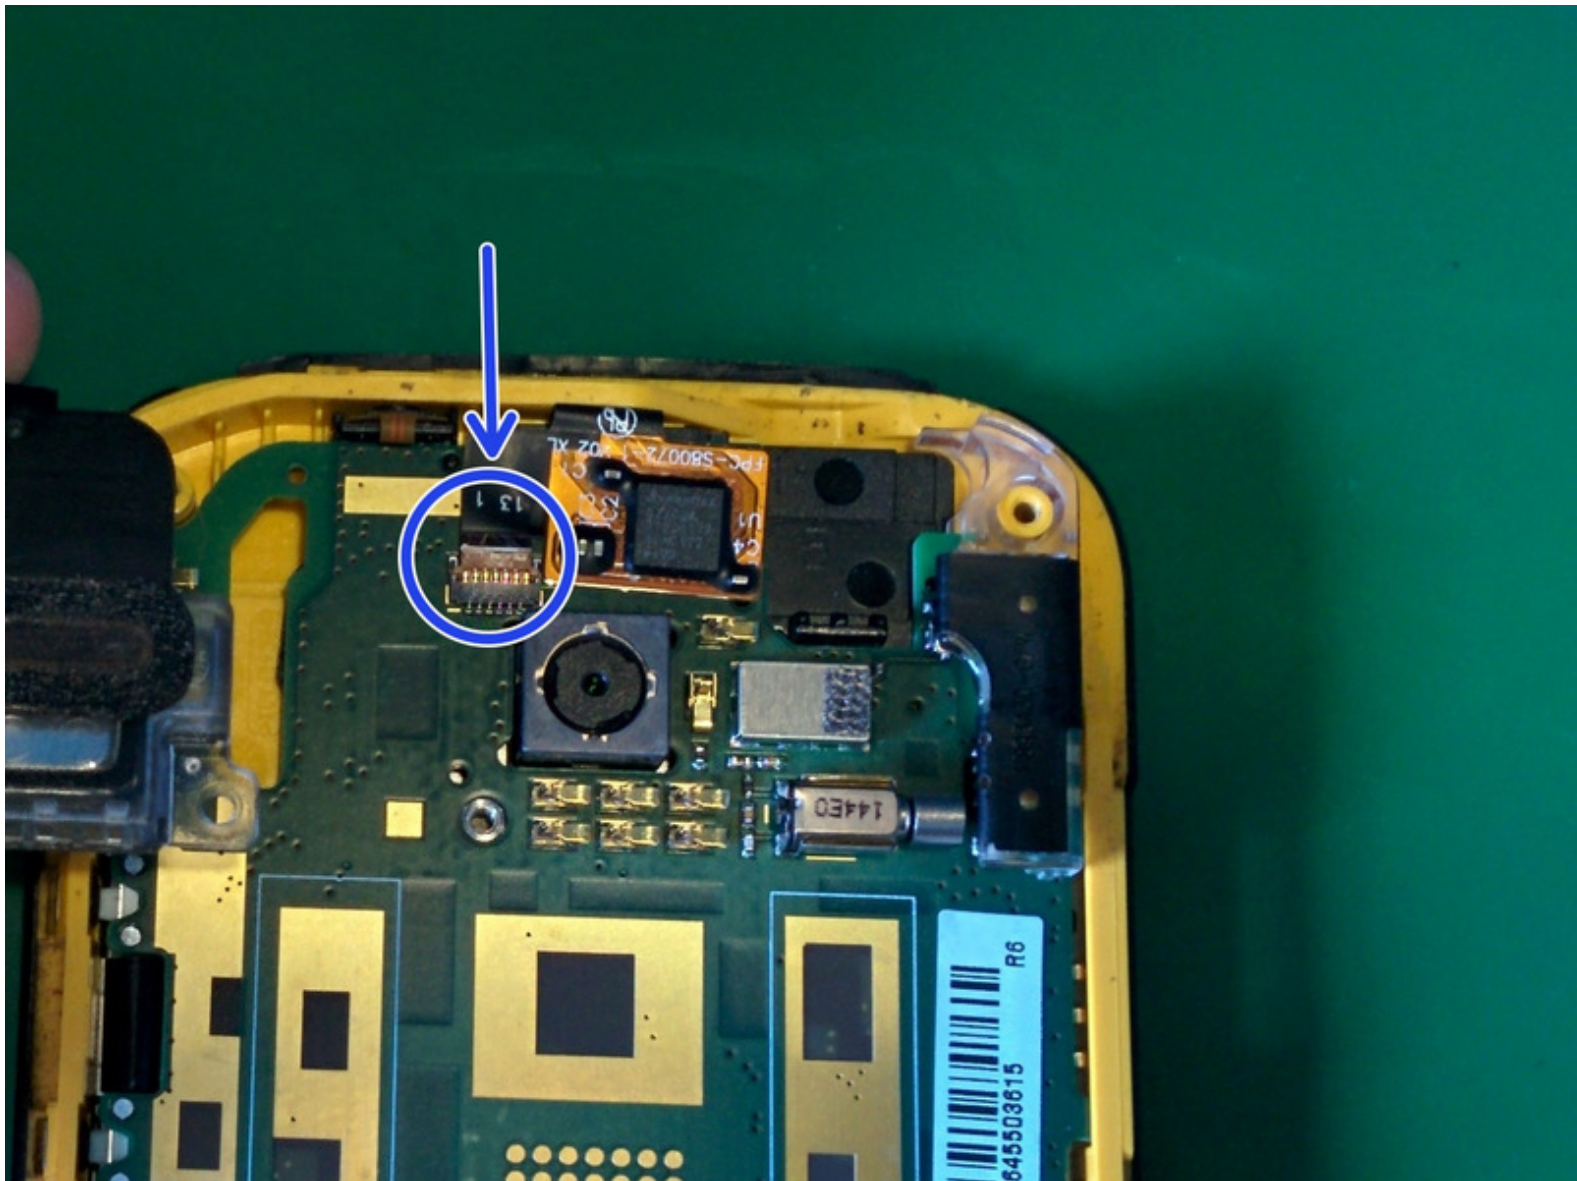


Step 1 — Digitiser Cable

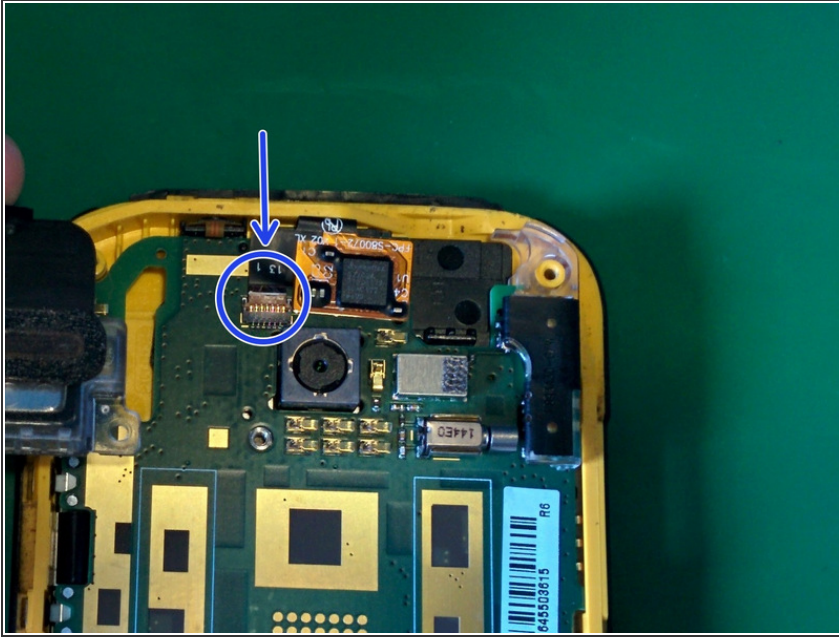

- Disconnect the digitizer cable from its socket, flip the brown clasp up from indicated edge and gently remove the cable.

Step 2 — Logic Board

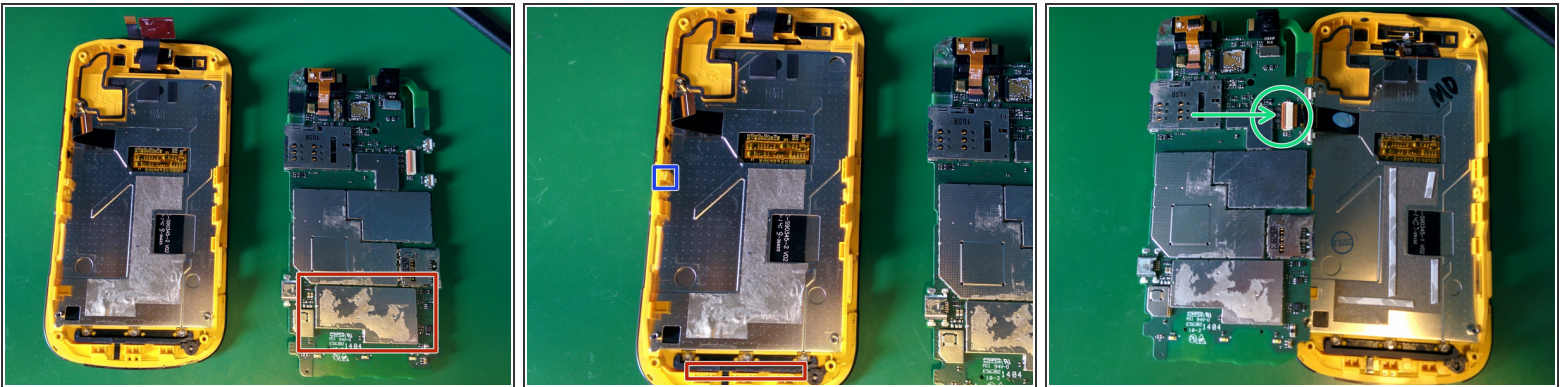

⚠ Be careful of LCD connector on the underside of the board through all of these steps (see green).

- Separate the logic board from front display. Apply heat to the front glass to loosen the adhesive, using a prying tool to separate the board. Be careful and move slowly, it is very strong.
- Be careful to remove the display first from the right side as there are clips along the left side.
- Ensure not to damage the LCD cable, remove once accessible by releasing the brown clasp from indicated side.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 03:23:51 AM.